

Getting started with a new Template for WinIPDS Pro:

1. Make sure you have the proper WinIPDS Pro (G59) installed. The “Template database level” of the software, must match the level of the template you plan to import.

Check the name of the received template file:



And check the Software overall status:


Status: Overall Status			
Device Name :	WinIPDS Pro (im-lbk)	Firmware - IPDS code Version :	WinIPDSPro-G59-20-001
Device Location :		Template Version :	v167
MAC Address :	00:19:D1:4E:33:7B	Service Max. Throughput :	Unlimited ppm Color and 130 ppm B/W
Gatemanager Status :	Not Connected (Not activated)	Last Heartbeat :	never
Current GM Protocol :			

(This info will also be listed in the release note)

2. Follow step 1-4 of the quick setup guide found inside the product's Web GUI:




3. Enter the drivers menu, and import the template (in this example it is a template collection for Fiery PRO80 controllers):

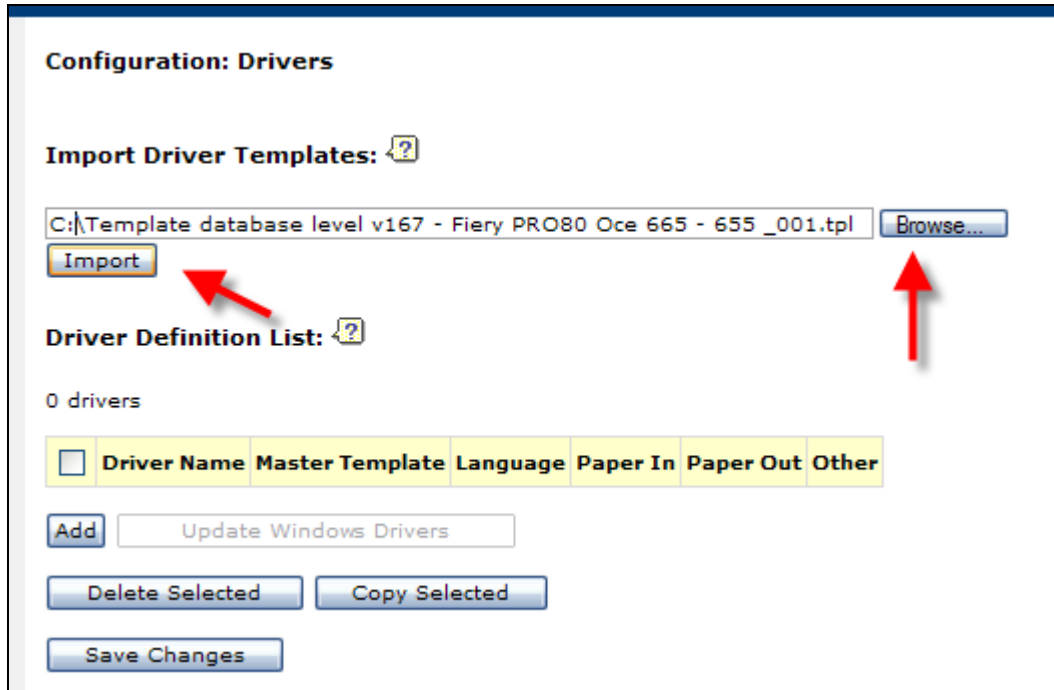

- Now select "Add", and ensure the desired template is selected. (In this case there is only one template in the template collection). Give it a name, and Save Changes:



- Select "input trays" for the driver:

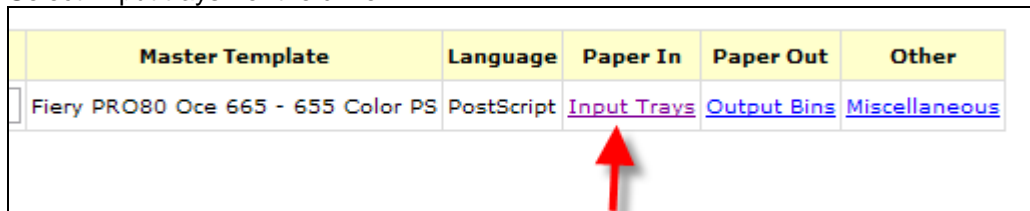


- Scroll to the "Input Trays" section, and ensure the paper sizes are matching the installed trays. They are all set to default A4.

Input Trays: ?

Name	Manual Feed	Selection	Before	After	Paper
Tray 1	<input type="checkbox"/>	"%%BeginFeature: :			A4
Tray 2	<input type="checkbox"/>	"%%BeginFeature: :			A4
Tray 3	<input type="checkbox"/>	"%%BeginFeature: :			A4
Tray 4 (PFU)	<input type="checkbox"/>	"%%BeginFeature: :			A4
Tray 5 (PFU)	<input type="checkbox"/>	"%%BeginFeature: :			A4
Auto	<input type="checkbox"/>	"%%BeginFeature: :			A4

Add



7. Scroll further down to the Input Tray Mappings. There is a default mapping of IPDS tray numbers and physical trays already defined, but you may want to re-map that according to what the host jobs defines.

Input Tray Mappings: ?

Input Tray	IPDS Tray Number	
Tray 1	0	Delete
Tray 2	1	Delete
Tray 3	2	Delete
Tray 4 (PFU)	3	Delete
Tray 5 (PFU)	4	Delete
Auto	5	Delete

Add

8. Follow step 8-14 of the "Quick Setup" guide. Note that in the Quick Setup guide step 9, you may need to set the page count update to Early.
9. Try to print IPDS.